FIRE KONTROL™ 3 HOUR FIRE, HEADER DETAIL, MASONRY HEADER CONSTRUCTION

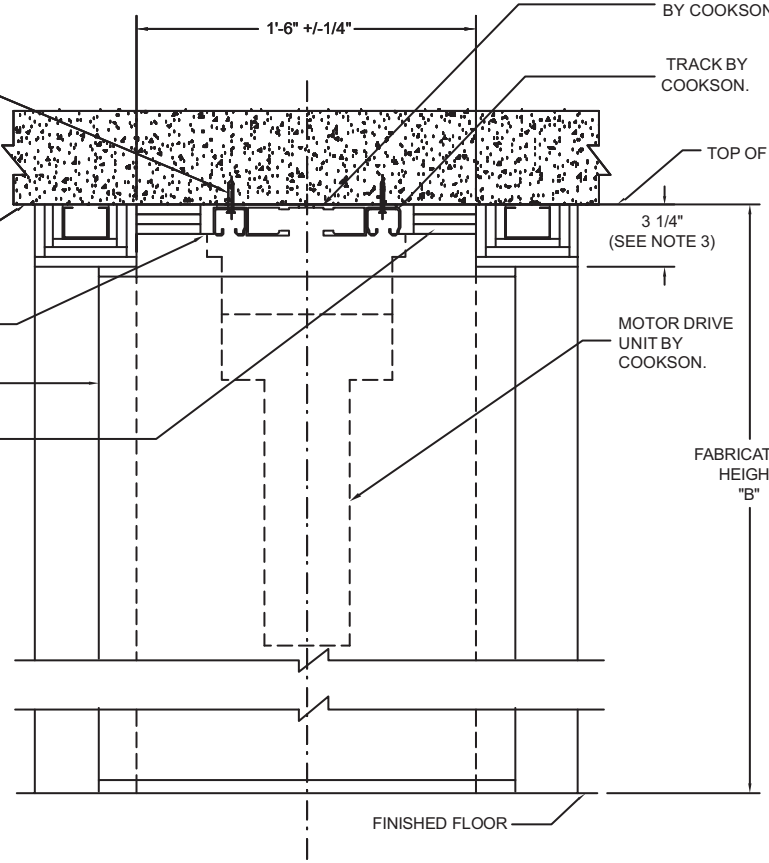

3/16" DIA. FLAT HEAD CONCRETE SCREWS WITH A MINIMUM 1" EMBEDMENT.

HEADER SHALL BE OF A MINUMUM 3320 PSI CONCRETE. HEADER MUST SIT TIGHT AGAINST REAR WALL OF POCKET. SEE NOTE 1.

METAL FLASHING BY COOKSON.

POCKET COVER DOOR BY OTHERS.

(3) LAYERS 1/2" THICK TYPE X GYPSUM BOARD, 3 5/8" WIDE AND CONTINUOUS FOR THE ENTIRE LENGTH OF OPENING AND TERMINATING 12" FROM THE BACK OF THE POCKET. TYPICAL ON BOTH SIDES OF HEADER. SEE NOTE 3.

NOTES:

1. HEADER MUST BE PARALLEL TO THE FLOOR WITH A MAXIMUM TOLERANCE OF (+/- 1/4").
2. ALL GYPSUM TO BE FURNISHED, FINISHED, AND FIELD PAINTED BY OTHERS.
3. MINIMUM DIMENSION REQUIRED TO MEET U.L. LABELING REQUIREMENTS. THE DIMENSION MAY BE INCREASED TO FURTHER RECESS THE HEADER IF REQUIRED.

© The Cookson Company