FIRE KONTROL™ , HEADER DETAIL, STEEL HEADER CONSTRUCTION

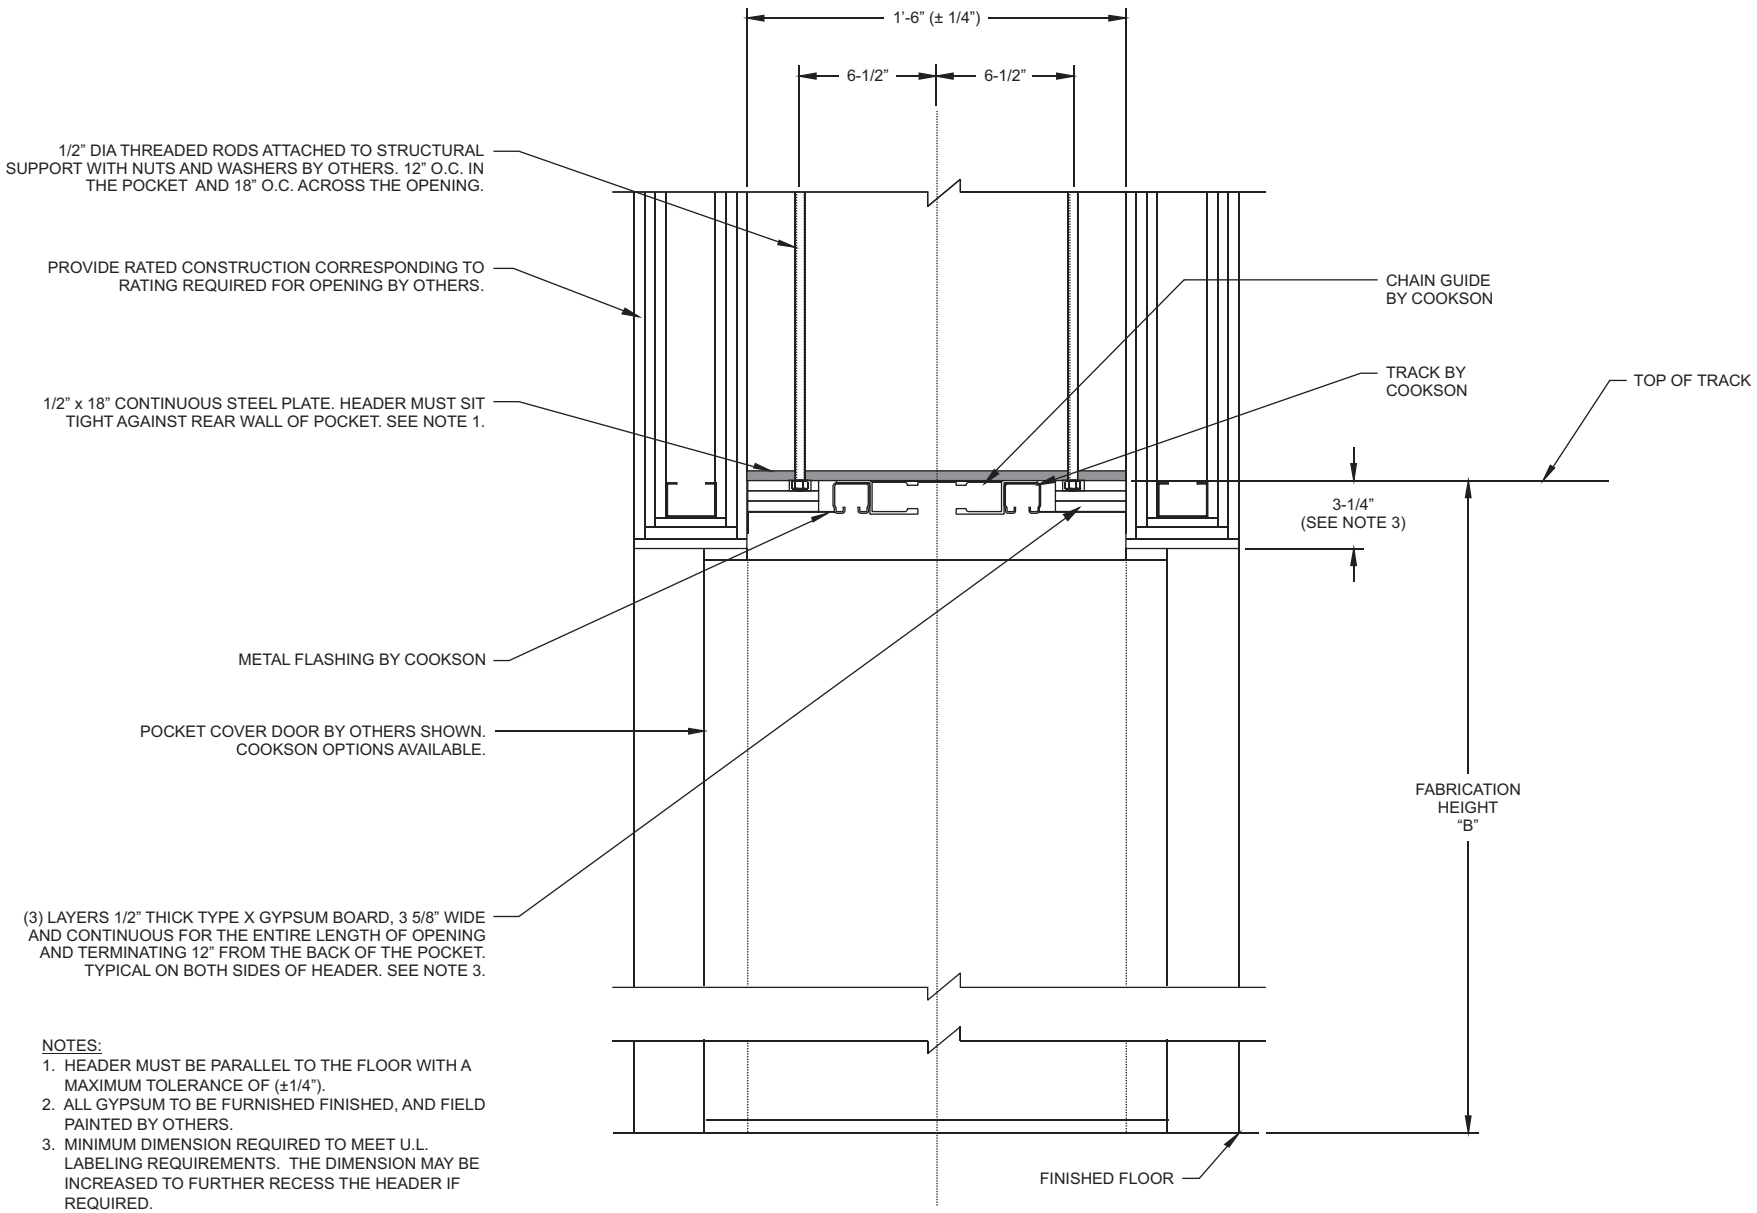

NOTES:

1. HEADER MUST BE PARALLEL TO THE FLOOR WITH A MAXIMUM TOLERANCE OF (±1/4").
2. ALL GYPSUM TO BE FURNISHED FINISHED, AND FIELD PAINTED BY OTHERS.
3. MINIMUM DIMENSION REQUIRED TO MEET U.L. LABELING REQUIREMENTS. THE DIMENSION MAY BE INCREASED TO FURTHER RECESS THE HEADER IF REQUIRED.

© The Cookson Company